


Kitchen Search




V8018 24 23/24



V8018 36 23/24



V8018 30 23/24



V8018 48 23/24



Specification & Installation Guide

Features

Furniture grade water proof polyvinyl
 Chloride board, protected with several
 Coats of polyurethane.

JENA

- Night lights & drawer lights with touch switches on both side panels.
- Luxury look Calacatta White or Light Grey matte glass drawer fronts.
- Two fully adjustable drawer with
 Full extension soft-close hardware.

Package Dimension

24" 26-3/8" X 20-15/32" X 24-1/64"

30" 32-43/64" X 20-15/32" X 24-1/64"

36" 38-37/64" X 20- 15/32" X 24-1/64"

Colors / Finishes

Box-Matte White

Drawer Fronts - Calacatta White or Light

Grey matte galsses.

Gross Weight

24" 48.5LBS


30" 52.91LBS


36" 59.52LBS


Sink Top Options


Vanities	Ceramic basin	Artificial stone basin
24" V8018 24 23/24	C04 2418	A10 2418 25
30" V8018 30 23/24	C04 3018	A10 3018 25
36" V8018 36 23/24	C04 3618	A10 3618 25
48" V8018 48 23/24 (two 24")	C04 4818D	A10 4818 25D

















JENA

Specifcation & Installation Guide

Hardware				Tools (not includes)	
No.		Draw	Qty		
А	Anchors	O Typina	2pcs		
В	Lag Bolt	⊕ ⊅	10pcs		
С	Leveling Bracket	10	2pcs		
D	Bolt	(A)	6pcs		

Wall Preparation

The typical dimensions shown will result in vanity cabinet height of 32-3/4" (831mm). Depending on the sinks selected, the total height will vary from 33-1/2" (850mm) 35-1/4" (895mm). If an alternate height is desired, adjust the rough-in and backing material heights using the dimensions provided.

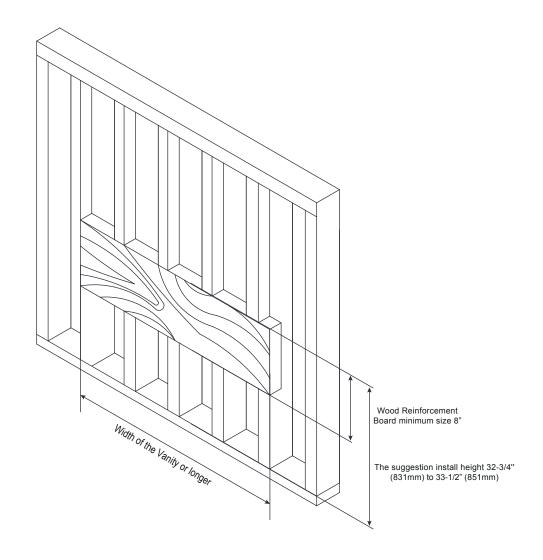


Cabinet positioning and installation


■ The suggestion height of vanity installation is 32-3/4" (831mm) - not including the basin.


JENA

- The height of Leveling Bracket Installation is 26-1/2" (671mm).
- Please reserve the power around 21-5/8(550mm) off ground.

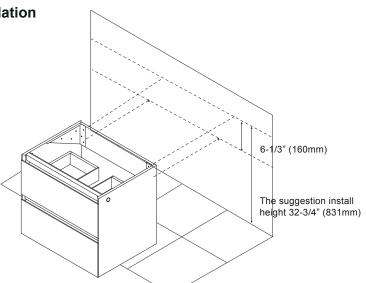

STEP 2. Leveling bracket installation & Wiring

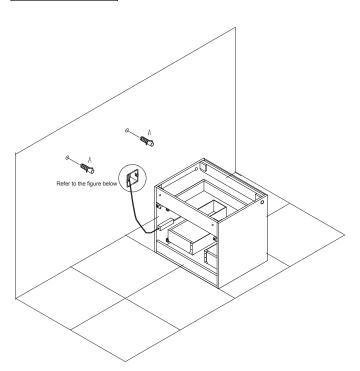



WARNING: Shut off power before wiring the vanity.



DANGER: READ AND FOLLOW ALL INSTRUCTIONS BEFORE USING THIS VANITY.



IMPORTANT SAFETY INSTRUCTIONS:

When using an electrical furnishing, basic precautions should always be followed, including the following:

WARNING:

To reduce the risk of burns, fire, electric shock or injury to persons, Use this furnishing only for its intended use as described in these instructions. Do not use attachments not recommended by the manufacturer. Never drop or insert any object into any opening. Do not use it for outdoors

WARNING:

Risk of electric shock. Connect this furnishing to a properly grounded circuit only. See Grounding instructions.

V GROUNDING INSTRUCTIONS:


This product must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal.

 $box{$\overline{V}$}$ **WARNING:**An Electrical option cabinet must be wired to a 20 Amp GFI (Ground Fault Interrupter) Protected circuit when used in bathrooms and all other locations required by the National Electric Code.

CAUTION: Require 120 VAC 20 Amp GFI protected circuit.

* PLEASE SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE






Place vanity on leveling bracket, Leveling brackets are only to

JENA

level the vanity. They are not designed for permanent support.

Vanity needs to be secured into the wood backing material.




STEP 4.

Fixed Cabinet


Install Lag Bolt after determined the height, left

& right position then fix the Vanity.

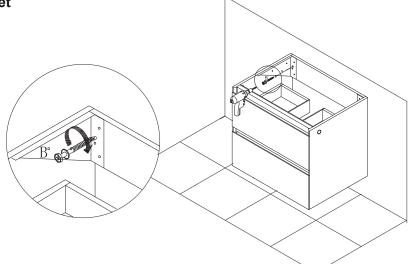

STEP 5.

Install sink top with Silicone



Specifcation & Installation Guide




If you need to install a 48" double basin


To make combination, take off the right light switch(Left vanity) and the left switch(right vanity) as shows below.

WARNING: Shut off power before wiring the vanity.


STEP1. Unplug the power cord.




STEP2. Push out the switch button from inside with a screw driver gently





STEP3. Link the wiring of the both vanities

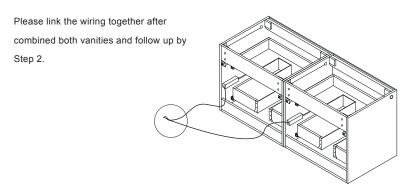



STEP 6. **Finish**







Kitchen Search 215.253.5800 | info@kitchensearch.com | www.kitchensearch.com

For clarification, please contact us at info@kitchensearch.com or www.kitchensearch.com
All dimensions are approximate and subject to standard tolerance. Specifications subject to change without prior notice.